


# Ultraviolet Water Disinfection Systems from VIQUA

The quality of drinking water can change with time and become contaminated with harmful bacteria. The VIQUA **HOME family** of compact UV disinfection systems provide a **reliable, economical,** and **chemical-free** way to safeguard drinking water in any residential application. VIQUA's range of products have been designed and tested to ensure quality drinking water is at everyone's finger tips.



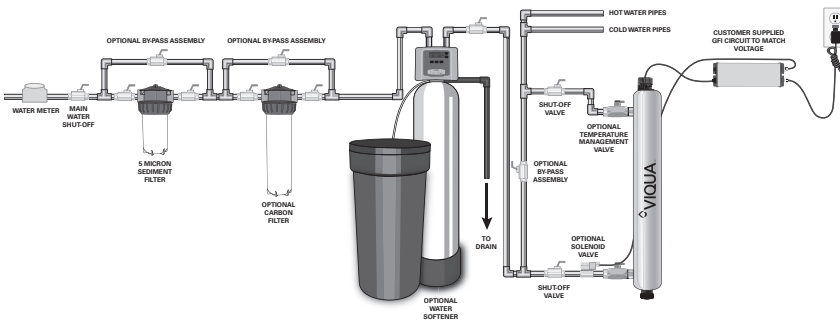


Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from just 6 GPM for a small home or cottage, up to 18 GPM for a larger home or small business.



## Features of VIQUA UV water disinfection systems

- Equipped to inactivate chlorine-resistant parasites such as **Cryptosporidium** and **Giardia**, harmful bacteria like **E.Coli**, and viruses not visible to the naked eye.
- Specially designed and tested Sterilume™-EX lamps provide **consistent and reliable** ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous purification.
- The system is simple to maintain and service allowing for easy lamp replacement.
- Built with a **durable stainless steel chamber** to prolong life and eliminate ultraviolet light degradation.
- The controller visually displays the remaining lamp life and will go into alarm if the lamp fails. Monitored systems are equipped with a UV sensor which provides a continuous readout of UV intensity.
- The controller has a sealed case to prevent damage from accidental water intrusion and is fully CSA and CE compliant.
- Monitored systems allow for the installation of an optional solenoid valve which will stop the flow of water through the chamber should the UV performance fall below a safe level.


# Specifications

					
MODEL	S5Q-PA	S8Q-PA	VH200	VH410	VH410M
<b>FLOW RATES</b>					
US Public Health (16 mJ/cm <sup>2</sup> )	11 GPM (42 lpm) (2.5 m <sup>3</sup> /hr)	19 GPM (72 lpm) (4.3 m <sup>3</sup> /hr)	16 GPM (60 lpm) (3.6 m <sup>3</sup> /hr)	34 GPM (130 lpm) (7.8 m <sup>3</sup> /hr)	34 GPM (130 lpm) (7.8 m <sup>3</sup> /hr)
VIQUA Standard (30 mJ/cm <sup>2</sup> )	6 GPM (23 lpm) (1.4 m <sup>3</sup> /hr)	10 GPM (38 lpm) (2.3 m <sup>3</sup> /hr)	9 GPM (34 lpm) (2.0 m <sup>3</sup> /hr)	18 GPM (70 lpm) (4.2 m <sup>3</sup> /hr)	18 GPM (70 lpm) (4.2 m <sup>3</sup> /hr)
NSF/EPA (40 mJ/cm <sup>2</sup> )	4.5 GPM (17 lpm) (1.0 m <sup>3</sup> /hr)	8 GPM (29 lpm) (1.8 m <sup>3</sup> /hr)	7 GPM (26 lpm) (1.6 m <sup>3</sup> /hr)	14 GPM (54 lpm) (3.3 m <sup>3</sup> /hr)	14 GPM (54 lpm) (3.3 m <sup>3</sup> /hr)
<b>DIMENSIONS</b>					
Dimensions	22" x 2.5" (56.1 cm x 6.5 cm)	35.5" x 2.5" (90.4 cm x 6.5 cm)	17.75" x 3.5" (45 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)
Inlet/Outlet Port Size	3/4" MNPT (1/2B - BSP)	3/4" MNPT (1/2B - BSP)	3/4" - 1" MNPT COMBO (1/2B - BSP)	3/4" - 1" MNPT COMBO (1/2B - BSP)	3/4" - 1" COMBO NPT (1/2B - BSP)
Shipping Weight	8 lbs (3.6 kg)	11 lbs (5 kg)	12 lbs (5.4 kg)	17 lbs (7.7 kg)	17 lbs (7.7 kg)
<b>ELECTRICAL</b>					
Voltage	100-240V / 50-60 Hz	100-240V / 50-60 Hz	100-240V / 50-60 Hz	100-240V / 50-60 Hz	100-240V / 50-60 Hz
Power Consumption	30 W	46 W	35 W	60 W	60 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)
Ambient Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)
<b>FEATURES</b>					
Visual "Power On"	YES	YES	YES	YES	YES
Chamber Material	304 SS	304 SS	304 SS	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES	YES	YES	YES
Audible Lamp Life Failure	YES	YES	YES	YES	YES
Audible Lamp Replacement Reminder	YES	YES	YES	YES	YES
UV Sensor	NO	NO	NO	NO	YES

## Replacement Parts

<b>S463RL</b> – UV lamp for S5Q-PA	<b>QS-410</b> – quartz sleeve for VH410 and VH410M
<b>S810RL</b> – UV lamp for S8Q-PA	<b>410867</b> – o-ring for quartz sleeves
<b>S200RL</b> – UV lamp for VH200	<b>RN-001</b> – retaining nut for all systems
<b>S410RL</b> – UV lamp for VH410 & VH410M	<b>BA-ICE-S</b> – electronic ICE controller for S5Q-PA and S8Q-PA
<b>QS-463</b> – quartz sleeve for S5Q-PA	<b>BA-ICE-CL</b> – electronic ICE controller for VH200, VH410
<b>QS-810</b> – quartz sleeve for S8Q-PA	<b>BA-ICE-CM</b> – electronic ICE controller VH410M
<b>QS-001</b> – quartz sleeve for VH200	

**S5Q-PA, S8Q-PA, VH200, VH410, & VH410M DOSE CURVES**

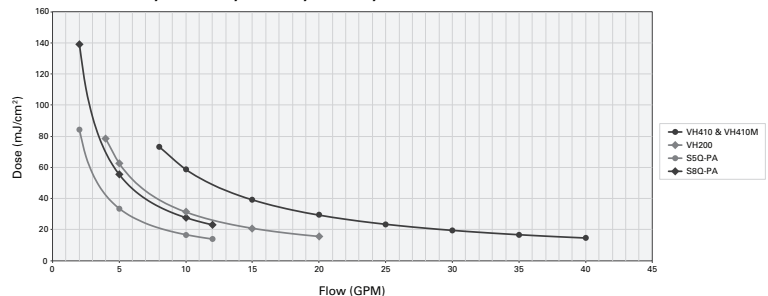

425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1  
 t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN) • t. +31.73.747.0144 (EUR)  
 info@viqua.com • [www.viqua.com](http://www.viqua.com)

LIT-520329-R\_RevA © 2016 VIQUA - a Trojan Technologies Business

